



PRO-257 — ATC Procedure to apply spacing minimum down to 2 NM

ATC Procedure to apply spacing minimum down to 2 NM

Category PROCEDURAL

Stakeholder **Air Navigation Service Provider**
Civil
Civil ATS Aerodrome Service Provider
Civil ATS Approach Service Provider

V3 End 05-03-2020

V4 Start -

V5 Start 31-10-2024

V4 End -

V5 End 31-12-2025

Air Navigation Service Provider: 31-12-2025


Civil
Civil ATS Aerodrome Service Provider: 31-12-2025
Civil ATS Approach Service Provider: 31-12-2025

IOC 31-12-2025

FOC 31-12-2026

Context

Related Elements

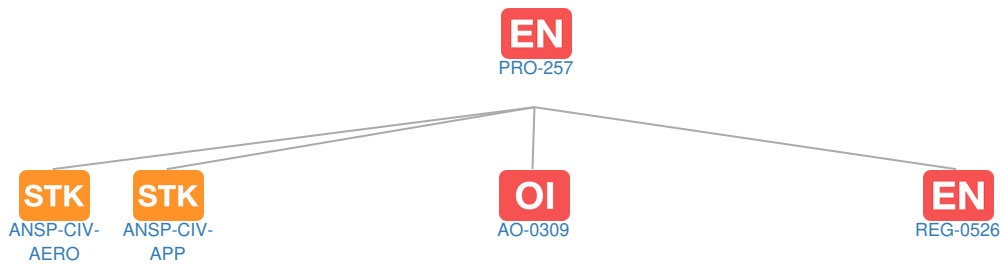

OI Operational Improvement Steps

Code	Benefits start date (IOC) - Full benefit date (FOC)																																				
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40											
PRO-257						▲					V5	IOC																									
AO-0309																																					

EN Dependent Enablers

Relationship	Code	Title	Related Elements
Enabled by	REG-0526	Regulatory provisions for Minimum-Pair separations based on RSP (Required Surveillance Performance)	EN

PCP PCP Elements: No associated data

STK Stakeholders

Code	Title	Related Elements
ANSP	Air Navigation Service Provider	EN
ANSP-CIV-AERO	Civil ATS Aerodrome Service Provider	EN
ANSP-CIV-APP	Civil ATS Approach Service Provider	EN

Standards: No associated data

OBJ Implementation Objectives: No associated data

Stakeholder Lines of Action (SLoAs): No associated data

PJ SESAR Workpackages: No associated data